


ALL DIMENSIONS ARE IN MM UNLESS OTHERWISE SPECIFIED

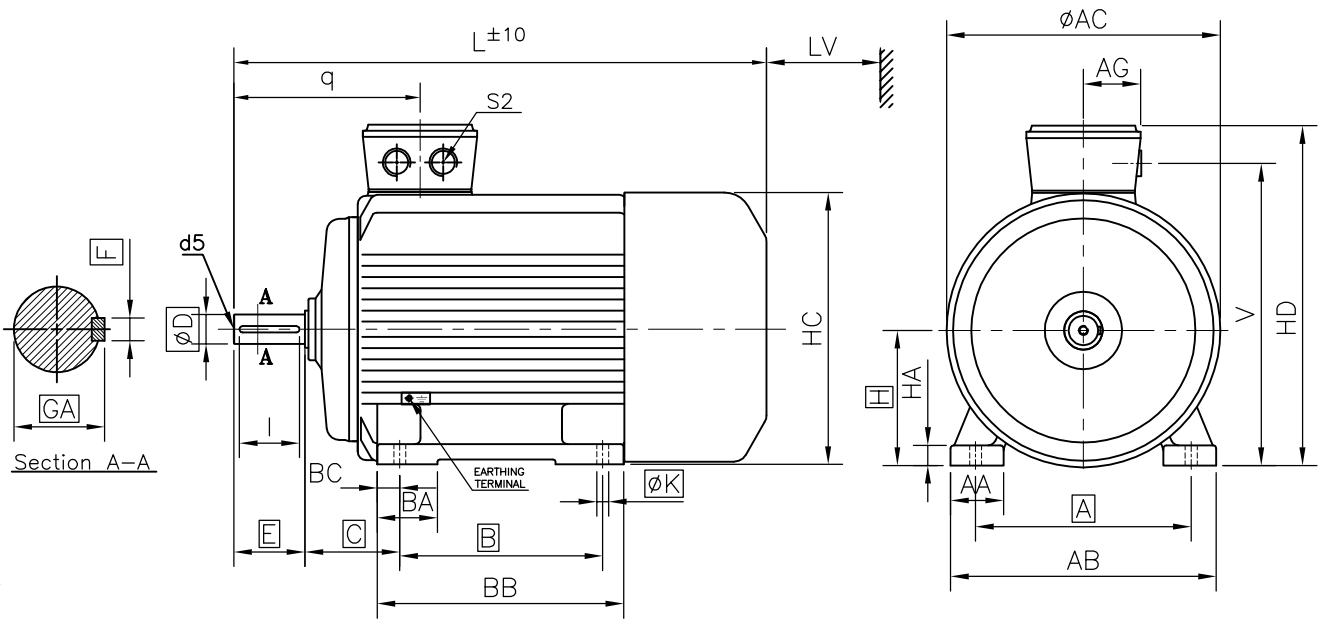

Fixing								General												
IEC Frame	Pole	A	B	—	C	H	∅K	AB	BB	AA	BA	—	BC	HA	HC	HD	—	L	∅AC	LV
90S	2,4,6,8	140	100	—	56	90	10	168	125	34	31.5	—	13	12	177	230	—	302	174	35

T Box					Shaft				
V	q	AG	S2	ØD	E	F	GA	I	d5
199	140	52	2x3/4"B.S.C.	24	50	8	27	45	M8

NOTES:-

- 1) SQUARE ('□') DIMENSIONS ARE AS PER IS:1231.
- 2) 'LV' IS MINIMUM DISTANCE TO BE MAINTAINED FOR EFFICIENT COOLING.
- 3) BODY MATERIAL-ALUMINIUM

AMENDMENT									
	⑥		DRG. REVISED FOR CHANGE IN DIMENSION 'BC'					VJM	13.07.18
	⑦	C/4	BODY MATERIAL ADDED					CRJ	03.05.18
	REV	ZONE	DESCRIPTION					SIGN	DATE
		NAME	DATE	Untolerated dimensions IS:1231 / IS:2223 / IS:2102-1-Very Coarse	TITLE: DIMENSIONAL DRAWING			W.O.NO.	SCALE NTS
	DRN	CRJ	07.04.2018						
	CHD	APH	07.04.2018						
	APPD	RSA	07.03.2018						
					DRG. NO: A09S43125 ^⑥			MOUNTING B3	FR. SIZE 90S
					REF.				