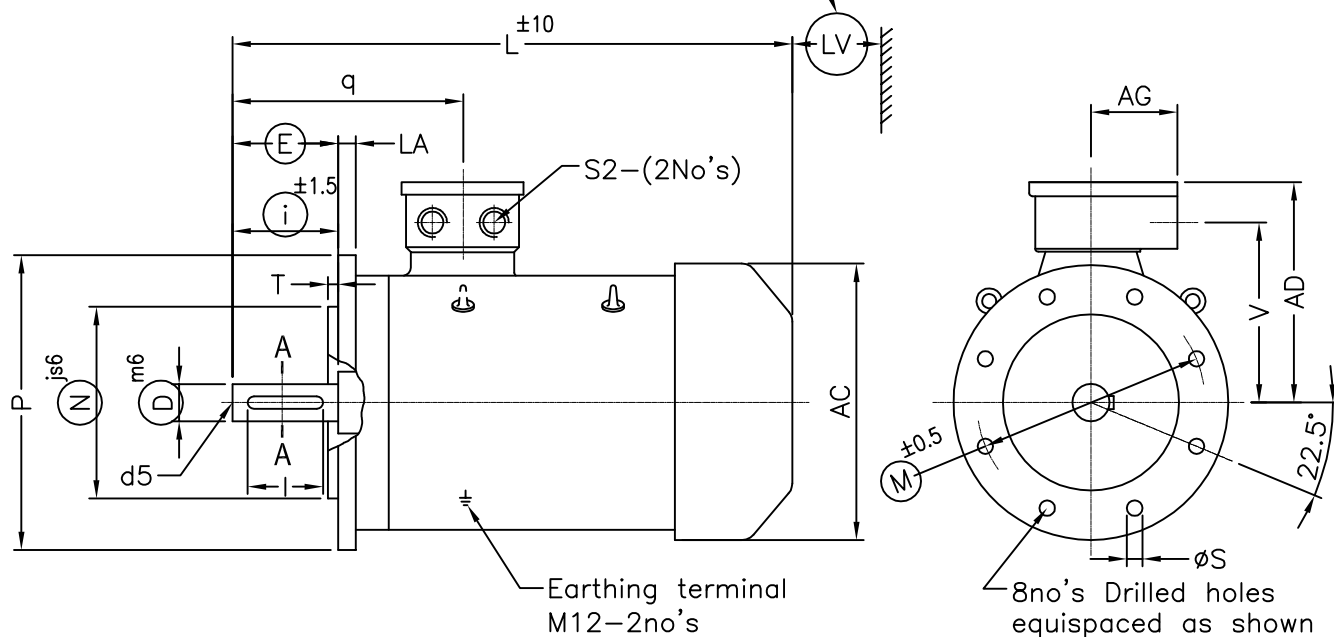



ALL DIMENSIONS ARE IN MM UNLESS OTHERWISE SPECIFIED

SCALE - N.T.S.

Minimum distance for efficient cooling
of motor (To be maintained by user)

IEC Frame	Pole	Fixing					General						T box			
		P	N	M	i	S	T	LA	AD	AC	L	LV	V	q	AG	S2
315S	2	660	550	600	140	24	6	22	515	615	1175	130	413	386	278	2" B.S.C.

Shaft					
D	E	F	GA	I	d5
65	140	18	69	130	M20




Notes:-

- Terminal box can be rotated in 360 deg in steps of 90 deg.
- Ringed dimensions are as per IS:1231/IEC60072/IS:2223

Customer		Project	
P.O. No.		Consultant	
kW/Pole		Client/Contractor	
Frame		Package	
SO No.		Tag no's	

NAME	DATE	TITLE:
DRN	YCJ	07.04.2015
CHD		
APPD		

Bharat Bijlee
AIROLI, NAVI MUMBAI



DRG. No: **A31S251TC[®]**

DIMENSION DRAWING

3PH SQUIRREL CAGE, TEFC (FLANGE MOUNTED) INDUCTION MOTOR (SAFE AREA)