

4

3

2

1

ALL DIMENSIONS ARE IN MM UNLESS OTHERWISE SPECIFIED

SCALE - N.T.S.

Minimum distance for efficient cooling
of motor (To be maintained by user)

F

F

E

E

D

D

C


C

B

B


A

A

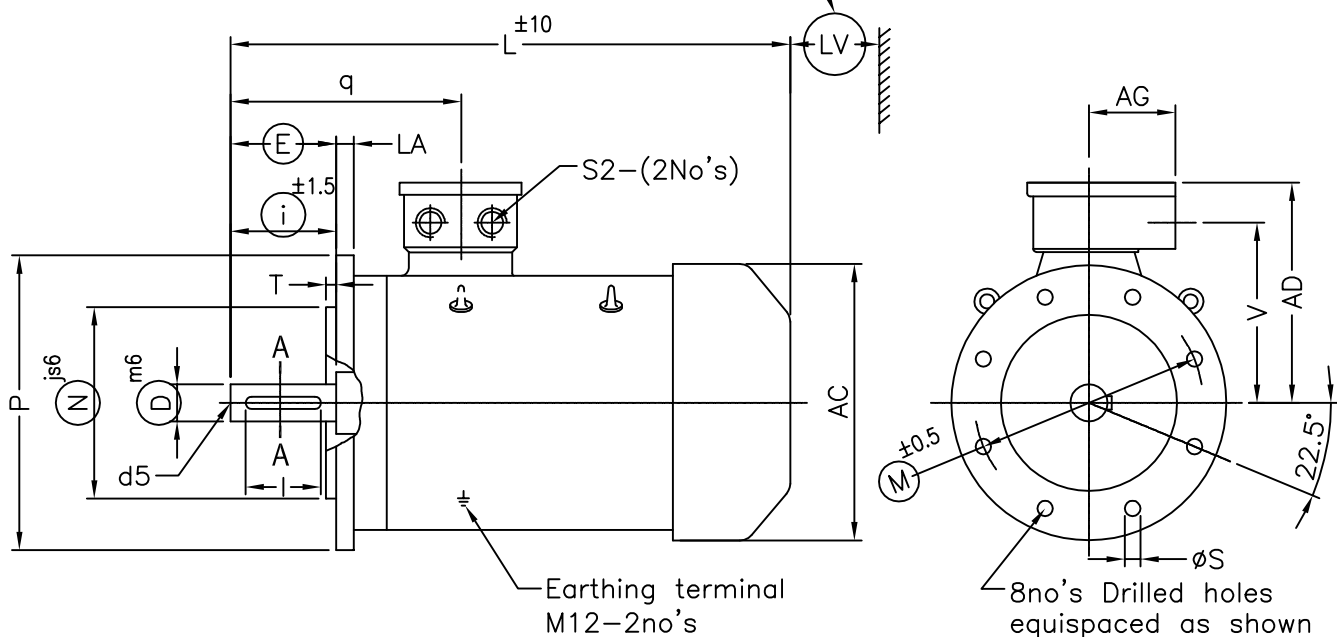

Fixing						General						T box				
IEC Frame	Pole	P	N	M	i	S	T	LA	AD	AC	L	LV	V	q	AG	S2
315L	4,6,8	660	550	600	170	24	6	22	515	615	1332	130	413	416	278	2.5" B.S.C.

Shaft					
D	E	F	GA	I	d5
90	170	25	95	160	M24




Notes:-

1. Terminal box can be rotated in 360 deg in steps of 90 deg.
2. Ringed dimensions are as per IS:1231/IEC60072/IS:2223

Customer		Project	
P.O. No.		Consultant	
kW/Pole		Client/Contractor	
Frame		Package	
SO No.		Tag no's	

NAME	DATE	TITLE: 3PH SQUIRREL CAGE, TEFC (FLANGE MOUNTED) INDUCTION MOTOR (SAFE AREA)
DRN	RBK	
CHD		
APPD		

Bharat Bijlee
AIROLI, NAVI MUMBAI



DRG. No:

A31L45059

4

3

2

1