

4

3

2

1


ALL DIMENSIONS ARE IN MM UNLESS OTHERWISE SPECIFIED

SCALE - N.T.S.

Minimum distance for efficient cooling of motor (To be maintained by user)

F

F

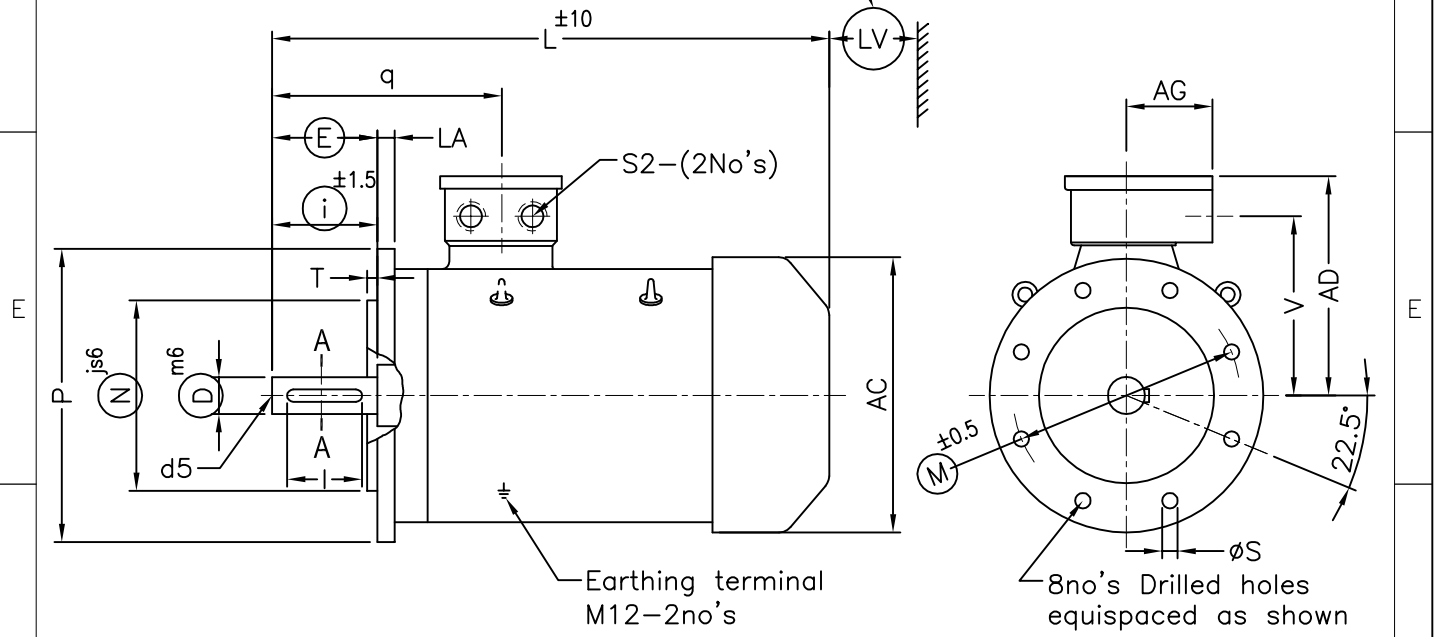


IEC Frame	Pole	Fixing					General					T box				
		P	N	M	i	S	T	LA	AD	AC	L	LV	V	q	AG	S2
315M	4&6	660	550	600	170	24	6	22	515	615	1167	130	413	416	278	2"B.S.C.

C

C

Shaft					
D	E	F	GA	I	d5
80	170	22	85	160	M20



Notes:-

- Terminal box can be rotated in 360 deg in steps of 90 deg.
- Ringed dimensions are as per IS:1231/IEC60072/IS:2223

B

B

Customer		Project	
P.O. No.		Consultant	
kW/Pole		Client/Contractor	
Frame		Package	
SO No.		Tag no's	


A

A

NAME	DATE	TITLE: 3PH SQUIRREL CAGE, TEFC (FLANGE MOUNTED) INDUCTION MOTOR(SAFE AREA)
DRN	YCJ 07.04.2015	
CHD		
APPD		

DRG. No: **A31M451TC**

**Bharat Bijlee**  
AIROLI, NAVI MUMBAI



4

3

2

1