


ALL DIMENSIONS ARE IN MM UNLESS OTHERWISE SPECIFIED

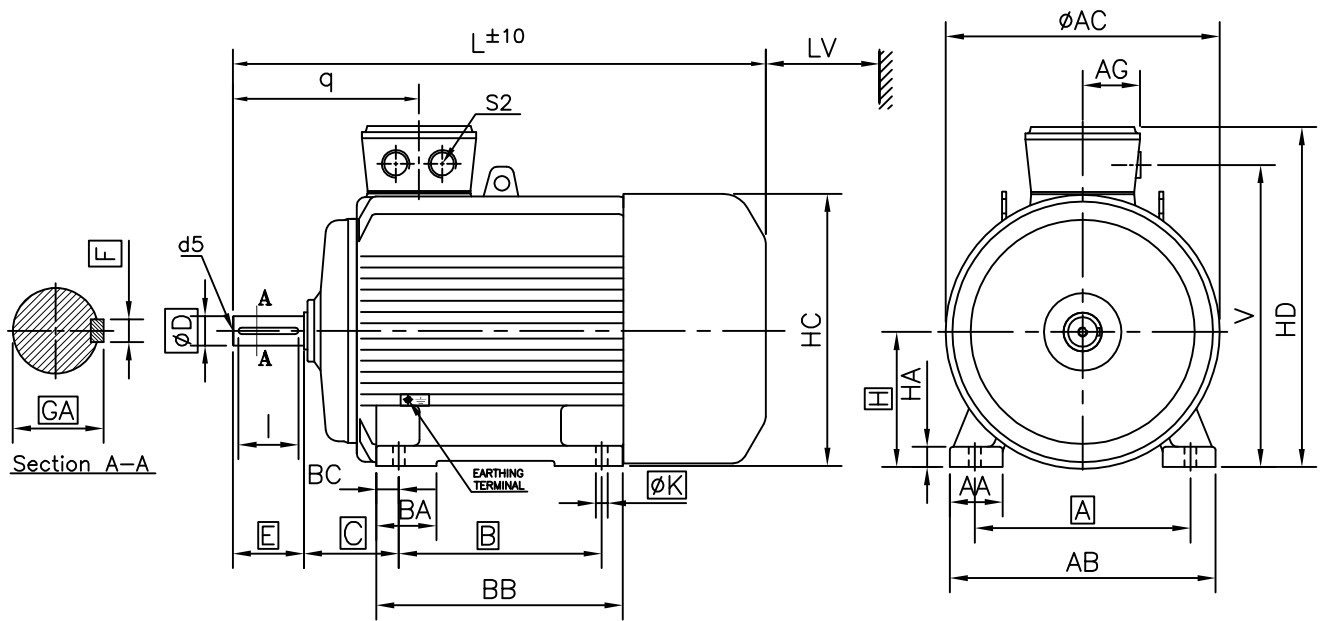


Fixing								General												
IEC Frame	Pole	A	B	—	C	H	∅K	AB	BB	AA	BA	—	BC	HA	HC	HD	—	L	∅AC	LV
112M	4,6&8	190	140	—	70	112	12	220	174	47	36	—	17	12	222	282	—	388	220	45

T Box					Shaft				
V	q	AG	S2	ØD	E	F	GA	I	d5
246	157	56	2x1"B.S.C.	28	60	8	31	55	M10

NOTES:-

- 1) SQUARE ('□') DIMENSIONS ARE AS PER IS:1231.
- 2) 'LV' IS MINIMUM DISTANCE TO BE MAINTAINED FOR EFFICIENT COOLING.
- 3) BODY MATERIAL-ALUMINIUM

AMENDMENT								
	④		DRAWING REVISED FOR STANDARDIZATION			CRJ	09.07.18	
	⑥		AMENDED AS PER NEW DRAWING			RBK	08.03.18	
	REV	ZONE	DESCRIPTION			SIGN	DATE	
		NAME	DATE	Untolerated dimensions IS:1231 / IS:2223 / IS:2102-1-Very Coarse 	TITLE: DIMENSIONAL DRAWING	W.O.NO.	SCALE NTS	
	DRN	S.P.K.	22.01.13					
	CHD	A.V.K.	22.01.13					
	APPD							
 Bharat Bijlee AIROLI, NAVI MUMBAI					DRG. NO:	A11M631TA ^④	MOUNTING B3	FR. SIZE 112M
					REF.			