

4

3

2

1


ALL DIMENSIONS ARE IN MM UNLESS OTHERWISE SPECIFIED

SCALE - N.T.S.

Minimum distance for efficient cooling of motor (To be maintained by user)

F

F

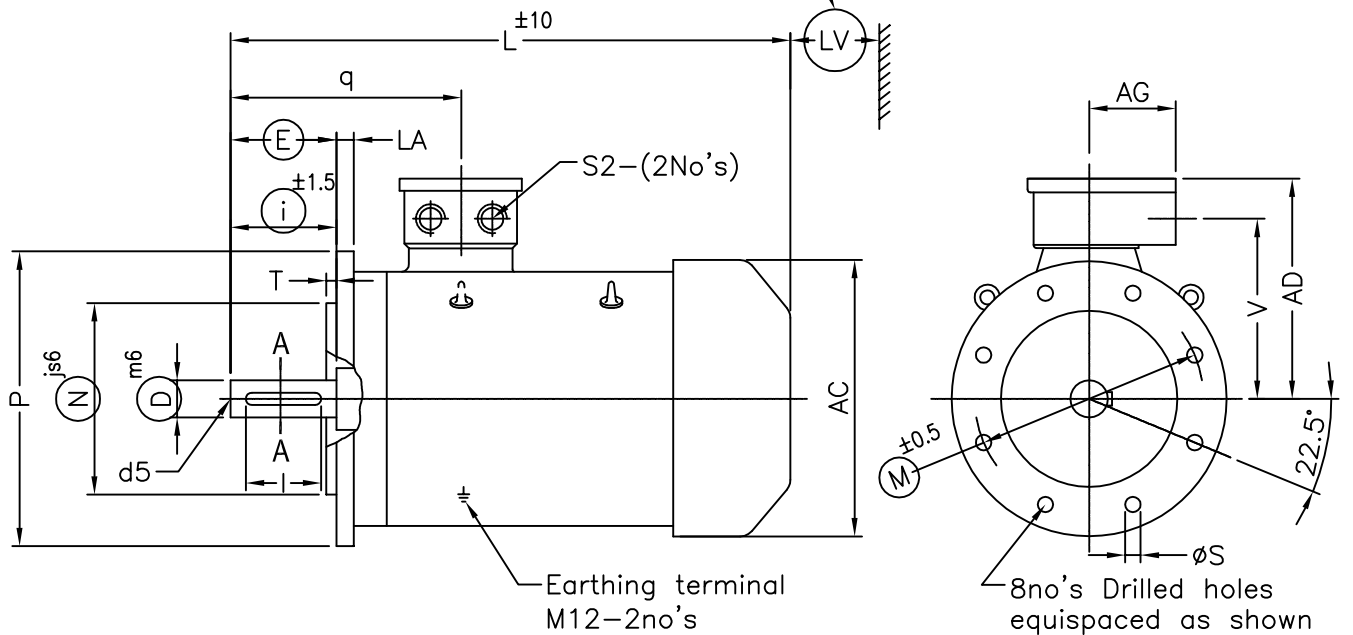

E

E

Fixing

General

T box


D

D

IEC Frame	Pole	P	N	M	i	S	T	LA	AD	AC	L	LV	V	q	AG	S2
355L	2	800	680	740	140	24	6	25	584	690	1461	145	495	434	305	3" B.S.C.

Shaft

D	E	F	GA	I	d5
75	140	20	79.5	130	M24



Section A-A

C

Notes:-

- Terminal box can be rotated in 360 deg in steps of 90 deg.
- Ringed dimensions are as per IS:1231/IEC60072/IS:2223

B

B

Customer		Project	
P.O. No.		Consultant	
kW/Pole		Client/Contractor	
Frame		Package	
SO No.		Tag no's	

A


A

	NAME	DATE
DRN	YCJ	07.04.2015
CHD		
APPD		

TITLE:

DIMENSION DRAWING

3PH SQUIRREL CAGE, TEFC (FLANGE MOUNTED) INDUCTION MOTOR (SAFE AREA)



DRG. No:

A35L251TC

4

3

2

1