

4

3

2

1

ALL DIMENSIONS ARE IN MM UNLESS OTHERWISE SPECIFIED

SCALE - N.T.S.


Minimum distance for efficient cooling
of motor (To be maintained by user)

F

F

E

E

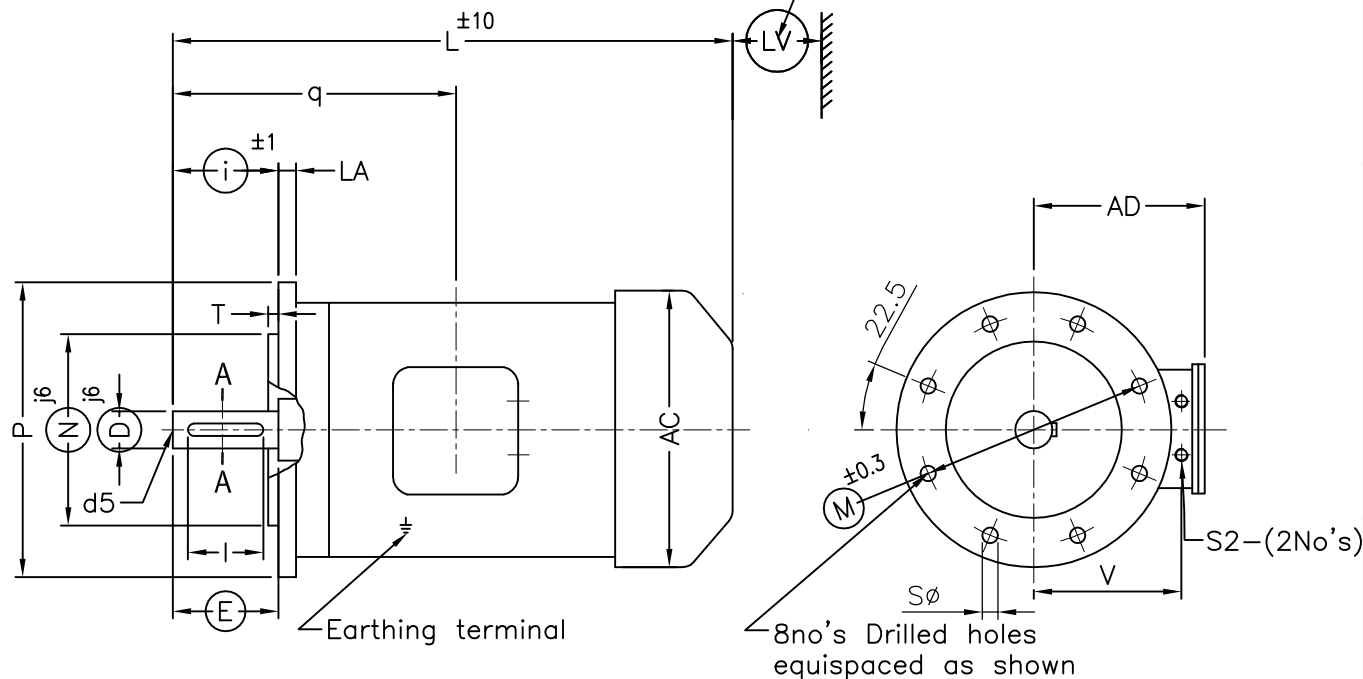

D


D

IEC Frame	Pole	General						T box									
		P	N	M	i	S	T	LA	AD	AC	L	LV	g	V	q	AG	S2
225M	4	450	350	400	140	19	5	16	344	450	877	90	284	273	445	172	2" BSC
	6										852						

C

C

Shaft					
D	E	F	GA	I	d5
60	140	18	64	130	M20



Notes:—

1. Terminal box can be rotated in 360 deg in steps of 90 deg.
2. Ringed dimensions are as per IS:1231/IEC60072/IS:2223

B

B

© AMENDED FOR DIMENSIONS--DNB--14.02.17

A

A


NAME	DATE
DRN YCJ	07.04.2015
CHD	
APPD	

TITLE:

DIMENSION DRAWING

3PH SQUIRREL CAGE, TEFC (FLANGE MOUNTED) INDUCTION MOTOR

Bharat Bijlee
AIROLI, NAVI MUMBAI



DRG. No:

A22M451RC®

4

3

2

1