

4

3

2

1

ALL DIMENSIONS ARE IN MM UNLESS OTHERWISE SPECIFIED

SCALE - N.T.S.

Minimum distance for efficient cooling
of motor (To be maintained by user)

F


F

E

E

D

D

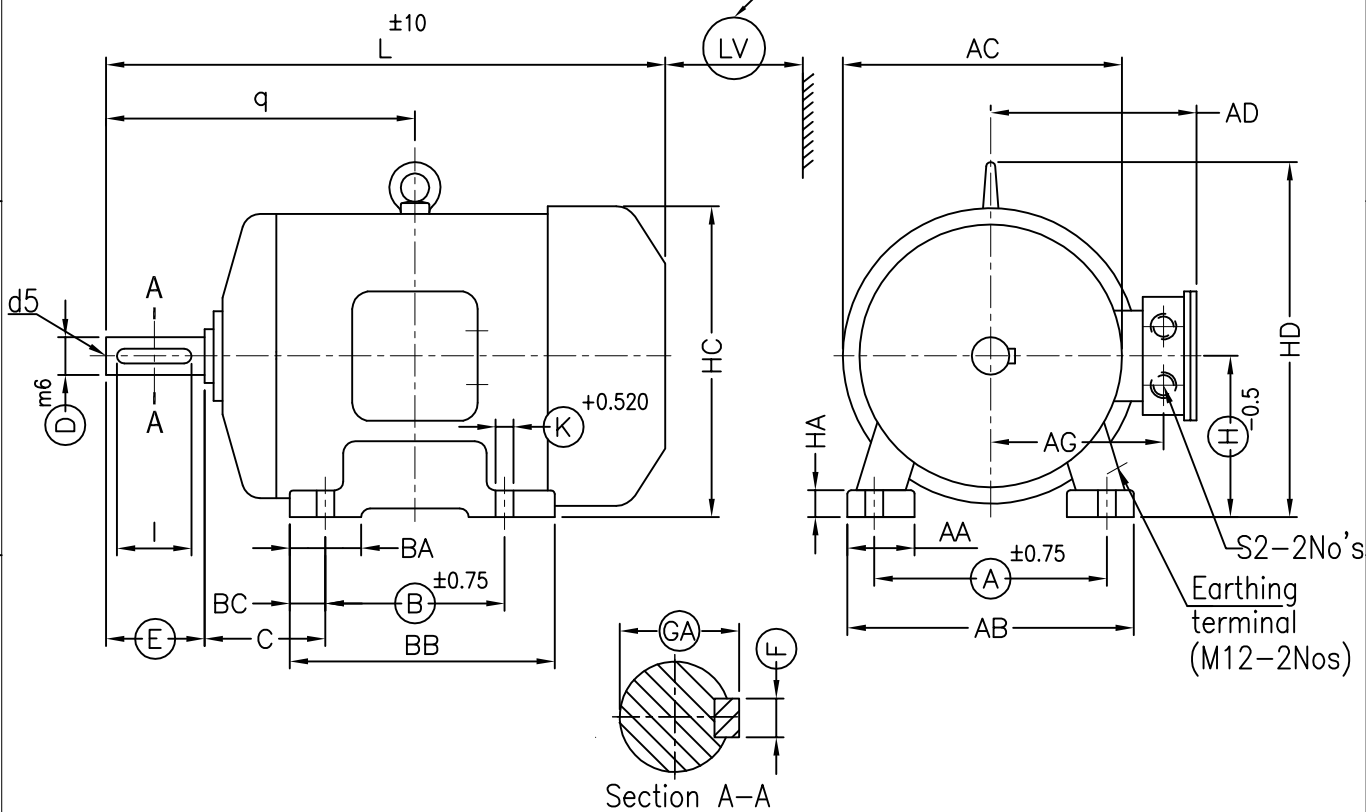

Section A-A

Fixing

General

IEC Frame	Pole	A	B	C	H	K	AB	BB	AA	BA	BC	HA	HC	HD	AD	L	LV
225M	4	356	311	149	225	19	436	361	85	85	28	34	450	509	344	877	90
	6															852	

T Box

Shaft

AC	q	AG	S2	D	E	F	GA	I	d5
450	445	273	2" B.S.C.	60	140	18	64	130	M20

Notes:-

- Terminal box can be rotated in 360 deg in steps of 90 deg.
- Ringed dimensions are as per IS:1231/IEC60072

Customer		Project	
P.O. No.		Consultant	
kW/Pole		Client/Contractor	
Frame		Package	
SO No.		Tag no's	

A

A

NAME	DATE
DRN YCJ	07.04.2015
CHD	
APPD	


TITLE:

DIMENSION DRAWING

3PH SQUIRREL CAGE, TEFC (FOOT MOUNTED) INDUCTION MOTOR (SAFE AREA)



Bharat Bijlee
AIROLI, NAVI MUMBAI



DRG. No:

A22M431RC

4

3

2

1