


ALL DIMENSIONS ARE IN MM UNLESS OTHERWISE SPECIFIED

SCALE - N.T.S.

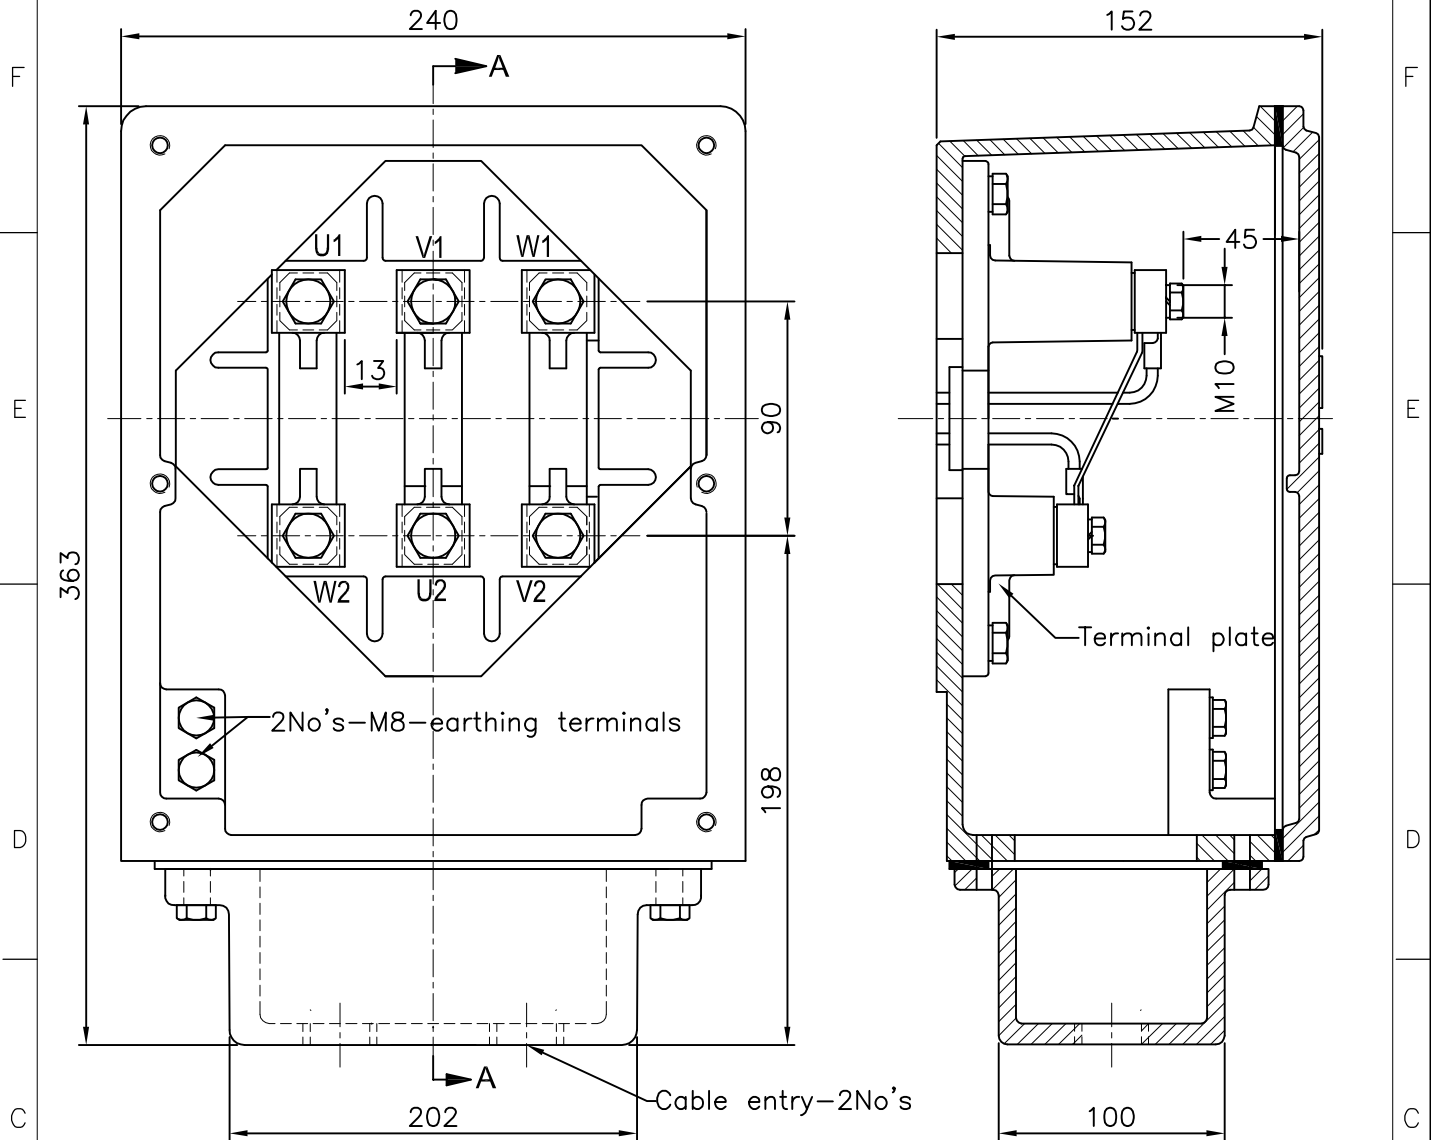

Notes:-

- 1) Terminal box material cast iron
- 2) Terminal box is rotatable by 360° in the step of 90°
- 3) Creepage distance 35mm

	Winding Terminals	SP Heater	Thermister	RTD+BTD	RTD
T. Box Provided	Yes	NA	NA	NA	NA
Cable size	1RX3CX150mmsq.	NA	NA	NA	NA
Cable entry	2" B.S.C.	NA	NA	NA	NA

Customer		Project	
P.O. No.		Consultant	
kW/Pole		Client/Contractor	
Frame		Package	
SO No.		Tag no's	

			FOR BBL REF. ONLY		
NAME	DATE	TITLE:	Max cable size (XLPL Armoured)	Max kW@415V	Cable entry
DRN	YCJ	250&280 FR. SAFE AREA MOTOR	1x3C/3.5Cx70mmsq.	55	1.5" B.S.C.
CHD		TERMINAL BOX ASSEMBLY	2x3C/3.5Cx70mmsq.	90	
APPD			1x3C/3.5Cx95mmsq.	75	
			2x3C/3.5Cx95mmsq.	90	
			1x3C/3.5Cx120mmsq.	75	2" B.S.C.
			2x3C/3.5Cx120mmsq.	90	
			1x3C/3.5Cx150mmsq.	90	
			1x3C/3.5Cx185mmsq.	90	

Bharat Bijlee
AIROLI, NAVI MUMBAI

DRG. No:
TBAA25MC00

