

4

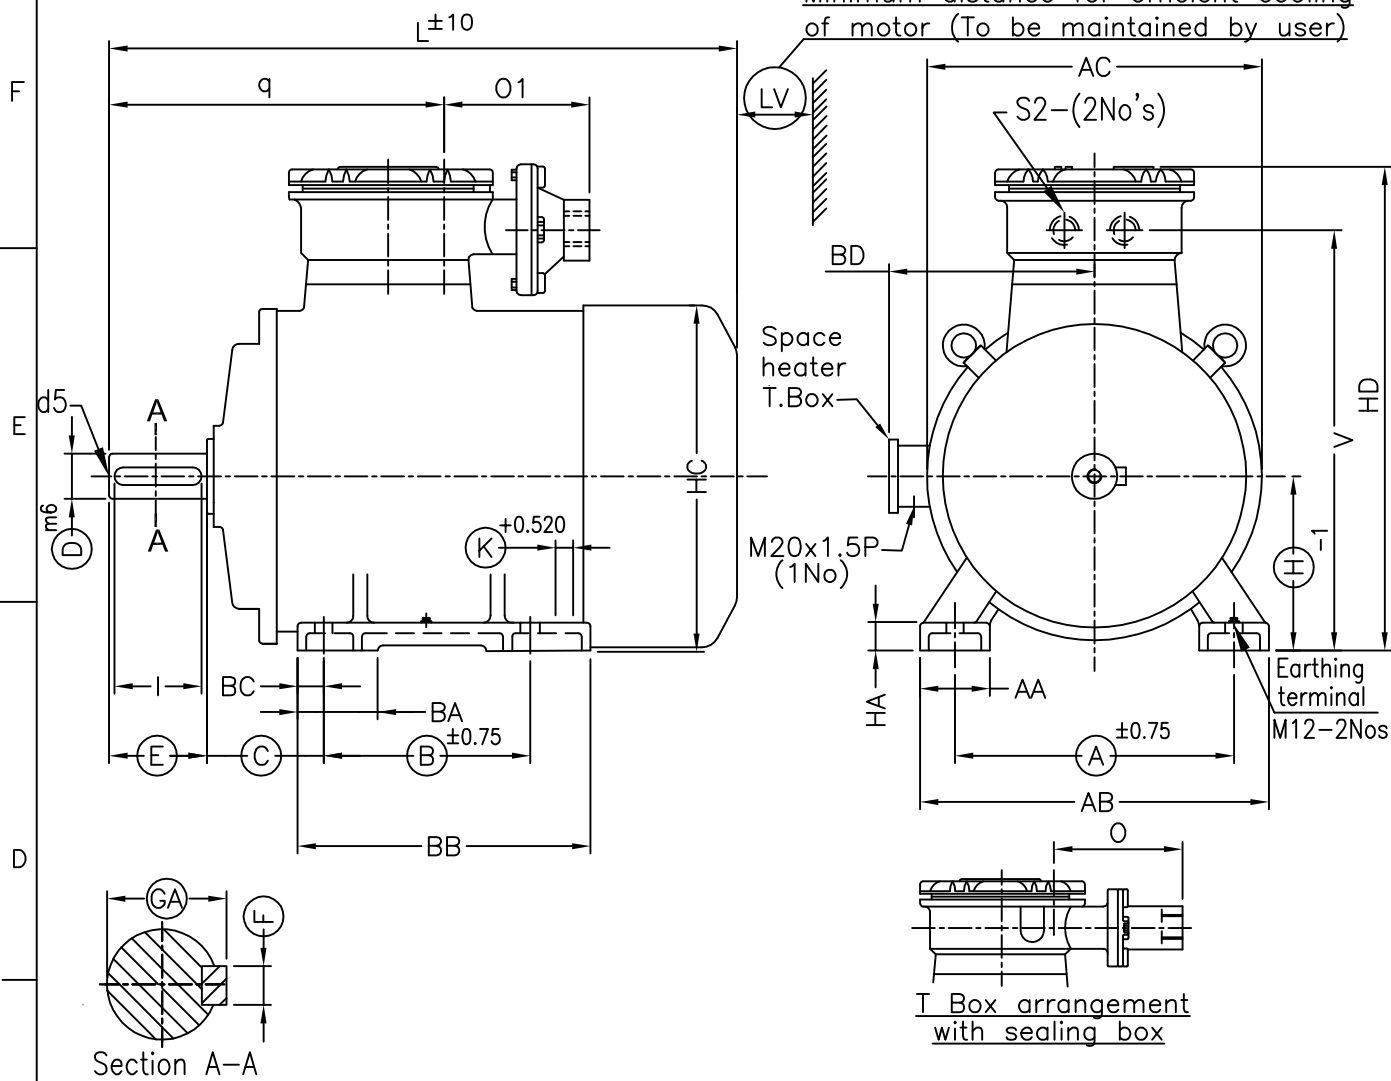
3

2

1

ALL DIMENSIONS ARE IN MM UNLESS OTHERWISE SPECIFIED

SCALE - N.T.S.

Minimum distance for efficient cooling
of motor (To be maintained by user)

Fixing						General											
IEC Frame	Pole	A	B	C	H	K	AB	BB	AA	BA	BC	HA	HC	HD	L	LV	AC
315L	4,6,8	508	508	216	315	28	625	593	120	115	46	45	617	850	1328	145	606

T Box						Shaft					
V	O	O1	BD	q	S2	D	E	F	GA	I	d5
758	276	225	430	696	M63x1.5P	90	170	25	95	160	M24

Notes:-

- 1) Ringed dimensions are as per IS:1231/IEC60072
- 2) Terminal box can be rotated in 360 deg in steps of 90 deg.

Customer		Project	
P.O. No.		Consultant	
kW/Pole		Client/Contractor	
Frame		Package	
SO No.		Tag no's	

NAME	DATE	TITLE:	
DRN	RBK	DIMENSION DRAWING	
CHD		3PH SQUIRREL CAGE, TEFC (FOOT MOUNTED) FLAME PROOF(Ex'd') INDUCTION MOTOR	
APPD			
Bharat Bijlee AIROLI, NAVI MUMBAI		DRG. No:	D31L43039

4

3

2

1