



ALL DIMENSIONS ARE IN MM UNLESS OTHERWISE SPECIFIED

SCALE - N.T.S.

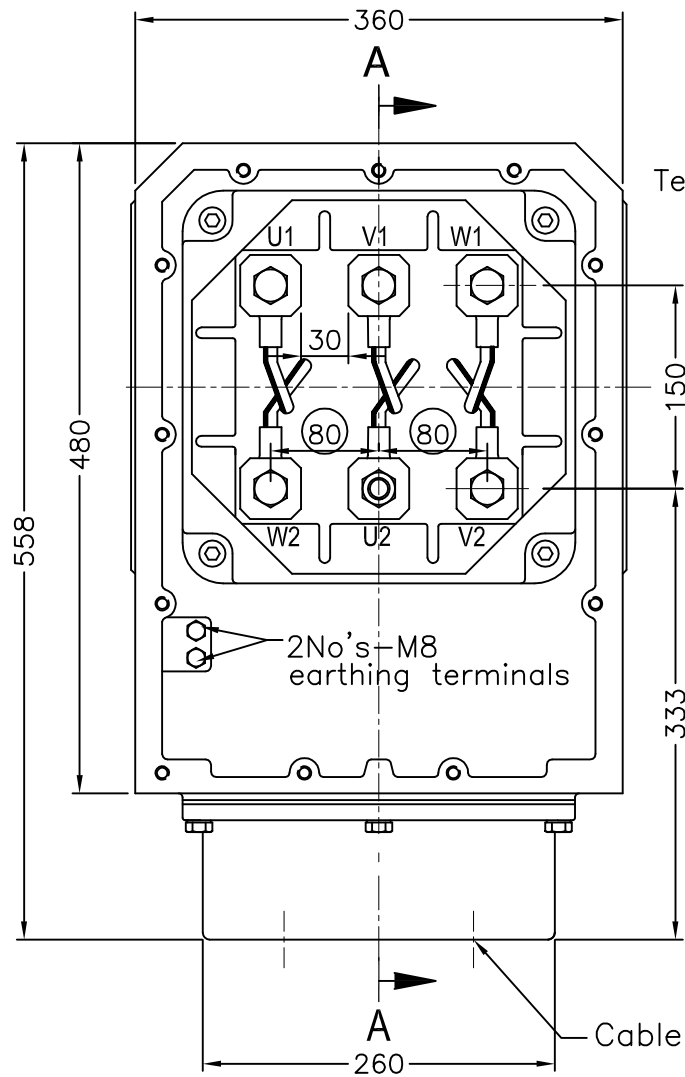

Terminal plate

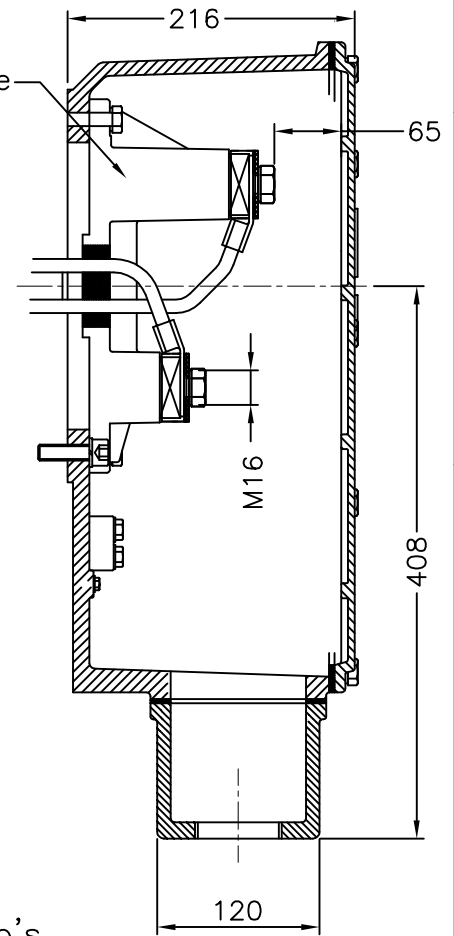

Section A-A

Notes:-

- 1) Terminal box material cast iron
- 2) Terminal box is rotatable by 360° in the step of 90°.
- 3) Creepage distance 48mm

	Winding Terminals	SP Heater	Thermister	RTD+RTD	RTD
T. Box Provided	Yes	NA	NA	NA	NA
Cable size	1RX3CX300mmsq	NA	NA	NA	NA
Cable entry	3" B.S.C.	NA	NA	NA	NA

Customer		Project	
P.O. No.		Consultant	
kW/Pole		Client/Contractor	
Frame		Package	
SO No.		Tag no's	

NAME	DATE	TITLE:	FOR BBL REF. ONLY
DRN	YCJ	355 FR. SAFE AREA MOTOR	Max cable size (XLPL Armoured)
CHD		TERMINAL BOX ASSEMBLY	Max kW @415V
APPD			Cable entry
			2x3C/3.5Cx185mmsq 180 2" B.S.C.
			3x3C/3.5Cx185mmsq 280 2" B.S.C.
			2x3C/3.5Cx240mmsq 200 2.5" B.S.C.
			1x3C/3.5Cx300mmsq 110 3" B.S.C.
			2x3C/3.5Cx300mmsq 225 3" B.S.C.
			1x3C/3.5Cx400mmsq 132 3" B.S.C.

Bharat Bijlee
AIROLI, NAVI MUMBAI

DRG. No:
TBAA-35L00

